


MIDEA MULTI SPLIT SYSTEM

FEATURES

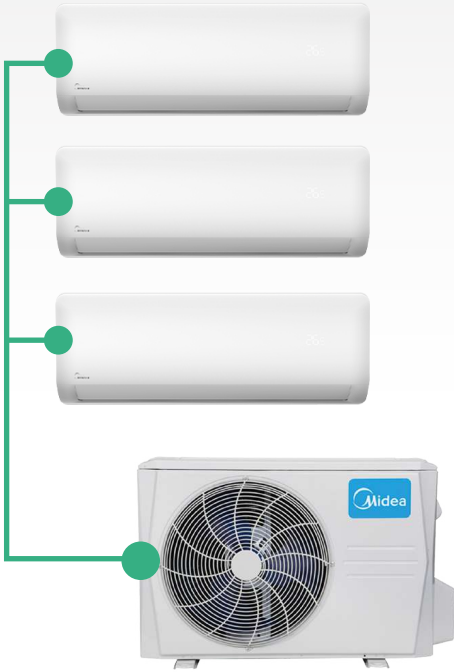

Reliable and Quality

Designed and built for the most extreme conditions globally, with the operating range from -20°C to 55°C.



Flexible Multi-Zone Comfort

Each indoor unit can be controlled independently, allowing you to set different temperatures for each room.



Energy Efficiency with R32 Refrigerant

Uses eco-friendly R32 refrigerant, which delivers better energy performance and has a lower environmental impact compared to older refrigerants.



Advanced Air Filtration

Equipped with multi-layer filters to capture dust, allergens and odours, great for improving indoor air quality, especially for families with kids or pets.



Quiet Operation

Designed to run with minimal noise, making them ideal for bedrooms, studies, or any quiet spaces in the home.

7 year parts and labour warranty

WIRELESS CONTROLLER

Temperature range	16-30°C 62-86°F
Blacklight	✓
Press button	✓
ON / OFF	✓
Mode	✓
Temp. Adjustment	✓
Fanspeed	✓
Turbo	✓
Follow me	✓
Timer ON/OFF	✓
Child Lock	✓
Dry	✓
Setting Temp Limit	✓



SPECIFICATIONS

MODEL NUMBER			MULMI0250B	MULMI0371B	MULMI0480B
Power supply		Ph-V-Hz	220-240-1-50	220-240-1-50	220-240-1-50
Cooling	Capacity (Indoor+Outdoor)*	kW	5.25	7.1	8.0
	Power input (Indoor+Outdoor)	kW	1.3	1.05	2.0
	Rated current (Indoor+Outdoor)	A	6.81	8.68	9.15
	EER (Indoor+Outdoor)*	W/W	4.03	3.64	4.00
Heating	Capacity (Indoor+Outdoor)*	kW	5.5	7.5	8.5
	Power input (Indoor+Outdoor)	kW	1.16	1.64	1.93
	Rated current (Indoor+Outdoor)	A	6.65	7.51	8.83
	COP (Indoor+Outdoor)*	W/W	4.74	4.57	4.40
Max. current		A	12	17.5	19.0
Outdoor unit	Dimension (H x W x D)	mm	805x330x554	890x342x673	946x410x810
	Packing (H x W x D)	mm	915x370x615	1030x438x750	1090x500x875
	Net / Gross weight	kg	34.6/37.7	48.1/51.6	66.2/71.6
Refrigerant	Type		R32	R32	R32
	Pre-charged length for all indoor to outdoor	m	15	22.5	30
Refrigerant piping	Luquid side		2 x ø6.35(1/4")	3 x ø6.35(1/4")	4 x ø6.35(1/4")
	Gas side		2 x ø9.52(3/8")	3 x ø9.52(3/8")	3xø9.52(3/8")+1xø12.7(1/2)
	Max. length for all rooms	m	40	60	80
	Max. length for one indoor unit	m	25	30	35
	Min. length for one indoor unit	m	6	9	12
	Max. height difference (m)	OU to IU	15	15	15
	IU to IU	10	10	10	




 **4.8** ★★★★★ **712+** Reviews



SPECIFICATIONS

MODEL NUMBER			MULMI0513B	MULMI0618B
Power supply		Ph-V-Hz	220-240-1-50	220-240-1-50
Cooling	Capacity (Indoor+Outdoor)*	kW	13.5	18.0
	Power input (Indoor+Outdoor)	kW	3.73	5.1
	Rated current (Indoor+Outdoor)	A	17.8	22.8
	EER (Indoor+Outdoor)*	W/W	3.62	3.53
Heating	Capacity (Indoor+Outdoor)*	kW	14.0	20.5
	Power input (Indoor+Outdoor)	kW	3.15	5.0
	Rated current (Indoor+Outdoor)	A	16.2	24.0
	COP (Indoor+Outdoor)*	W/W	4.44	4.10
Max. current		A	30	33
Outdoor unit	Dimension (H x W x D)	mm	980x415x975	952x415x1480
	Packing (H x W x D)	mm	1145x500x1080	1095x495x1480
	Net / Gross weight	kg	91/106.4	110.6/124.9
Refrigerant	Type		R32	R32
	Pre-charged length for all indoor to outdoor	m	37.5	45
Refrigerant piping	Luquid side		5 x ø6.35(5x1/4")	6 x ø6.35(1/4")
	Gas side		3 x ø9.52+2xø12.7(3x3/8"+2x1/2")	4 x ø9.52(3/8")+2xø12.7(1/2")
	Max. length for all rooms	m	80	80
	Max. length for one indoor unit	m	35	35
	Min. length for one indoor unit	m	15	15
	Max. height difference (m)	OU to IU	15	15
	IU to IU	10	10	

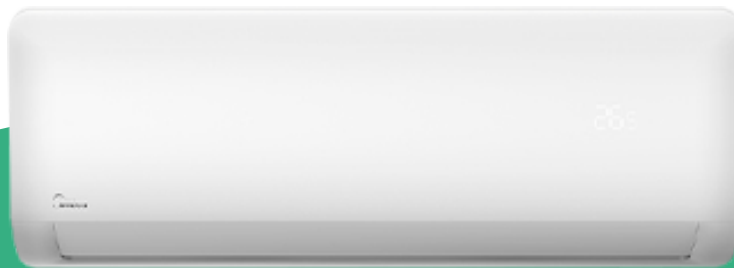

 **4.8** ★★★★★ **712+** Reviews

