


# MIDEA SPLIT SYSTEM

## FEATURES

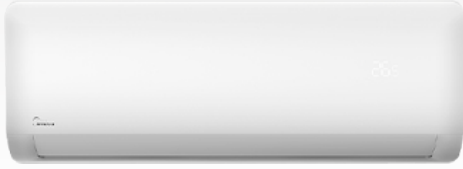

### Reliable and Quality

Designed and built for the most extreme conditions globally, with the operating range from -20°C to 55°C.



### Energy Efficiency with R32 Refrigerant

Uses eco-friendly R32 refrigerant, which delivers better energy performance and has a lower environmental impact compared to older refrigerants.



### Advanced Air Filtration

Equipped with multi-layer filters to capture dust, allergens and odours, great for improving indoor air quality, especially for families with kids or pets.



### Quiet Operation

Designed to run with minimal noise, making them ideal for bedrooms, studies, or any quiet spaces in the home.

7 year parts and labour warranty

## WIRELESS CONTROLLER

Temperature range	16-30°C 62-86°F
Blacklight	✓
Press button	✓
ON / OFF	✓
Mode	✓
Temp. Adjustment	✓
Fanspeed	✓
Turbo	✓
Follow me	✓
Timer ON/OFF	✓
Child Lock	✓
Dry	✓
Setting Temp Limit	✓



# SPECIFICATIONS

MODEL NUMBER			MULMI0250B	MULMI0371B	MULMI0480B
Power supply		Ph-V-Hz	220-240-1-50	220-240-1-50	220-240-1-50
Cooling	Capacity (Indoor+Outdoor)*	kW	5.25	7.1	8.0
	Power input (Indoor+Outdoor)	kW	1.3	1.05	2.0
	Rated current (Indoor+Outdoor)	A	6.81	8.68	9.15
	EER (Indoor+Outdoor)*	W/W	4.03	3.64	4.00
Heating	Capacity (Indoor+Outdoor)*	kW	5.5	7.5	8.5
	Power input (Indoor+Outdoor)	kW	1.16	1.64	1.93
	Rated current (Indoor+Outdoor)	A	6.65	7.51	8.83
	COP (Indoor+Outdoor)*	W/W	4.74	4.57	4.40
Max. current		A	12	17.5	19.0
Outdoor unit	Dimension (H x W x D)	mm	805x330x554	890x342x673	946x410x810
	Packing (H x W x D)	mm	915x370x615	1030x438x750	1090x500x875
	Net / Gross weight	kg	34.6/37.7	48.1/51.6	66.2/71.6
Refrigerant	Type		R32	R32	R32
	Pre-charged length for all indoor to outdoor	m	15	22.5	30
Refrigerant piping	Luquid side		2 x ø6.35(1/4")	3 x ø6.35(1/4")	4 x ø6.35(1/4")
	Gas side		2 x ø9.52(3/8")	3 x ø9.52(3/8")	3xø9.52(3/8")+1xø12.7(1/2)
	Max. length for all rooms	m	40	60	80
	Max. length for one indoor unit	m	25	30	35
	Min. length for one indoor unit	m	6	9	12
	Max. height difference (m)	OU to IU	15	15	15
	IU to IU	10	10	10	




 **4.8** ★★★★★ **712+** Reviews



# SPECIFICATIONS

MODEL NUMBER			MULMI0513B	MULMI0618B
Power supply		Ph-V-Hz	220-240-1-50	220-240-1-50
Cooling	Capacity (Indoor+Outdoor)*	kW	13.5	18.0
	Power input (Indoor+Outdoor)	kW	3.73	5.1
	Rated current (Indoor+Outdoor)	A	17.8	22.8
	EER (Indoor+Outdoor)*	W/W	3.62	3.53
Heating	Capacity (Indoor+Outdoor)*	kW	14.0	20.5
	Power input (Indoor+Outdoor)	kW	3.15	5.0
	Rated current (Indoor+Outdoor)	A	16.2	24.0
	COP (Indoor+Outdoor)*	W/W	4.44	4.10
Max. current		A	30	33
Outdoor unit	Dimension (H x W x D)	mm	980x415x975	952x415x1480
	Packing (H x W x D)	mm	1145x500x1080	1095x495x1480
	Net / Gross weight	kg	91/106.4	110.6/124.9
Refrigerant	Type		R32	R32
	Pre-charged length for all indoor to outdoor	m	37.5	45
Refrigerant piping	Luquid side		5 x ø6.35(5x1/4")	6 x ø6.35(1/4")
	Gas side		3 x ø9.52+2xø12.7(3x3/8"+2x1/2")	4 x ø9.52(3/8")+2xø12.7(1/2")
	Max. length for all rooms	m	80	80
	Max. length for one indoor unit	m	35	35
	Min. length for one indoor unit	m	15	15
	Max. height difference (m)	OU to IU	15	15
	IU to IU	10	10	

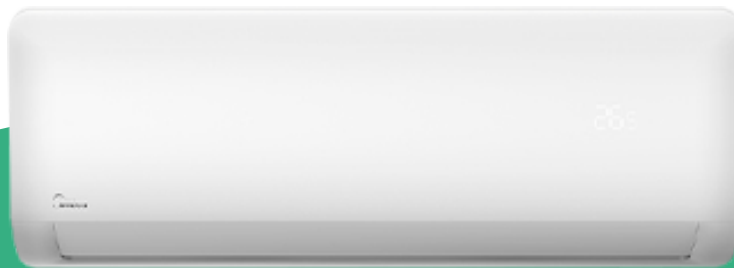

 **4.8** ★★★★★ **712+** Reviews

