


MITSUBISHI ELECTRIC SPLIT SYSTEM



FEATURES

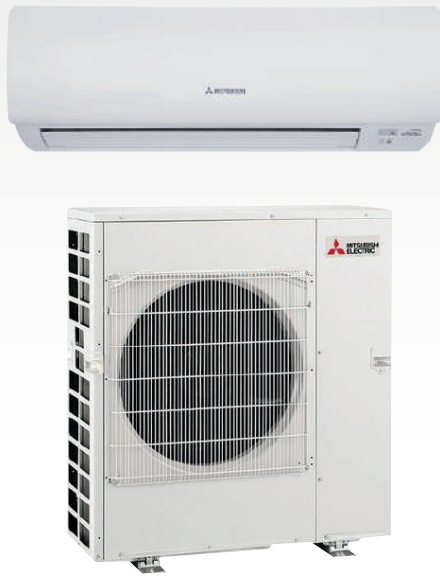

Quiet Operation
for Peaceful
Comfort



Vertical & Horizontal
Vanes



Dual Barrier
Coating



Wide and Long
Airflow

5 year parts and labour warranty

SPECIFICATIONS

OUTDOOR UNIT		MXZ-6F120 VGD-A1
Refrigerant		R32
Power Supply (V, Phase, Hz)		220 V, single, 60 Hz/230 V, single, 50 Hz
Cooling	Capacity [Min-Rated-Max]	kW 3.5 - 12.0 - 14.0
	Total Input [Rated]	kW 3.3
	AEER/EER	3.61/3.64
	Running Current [Rated]	A 15.2 - 14.5
	Sound Pressure Level	dBA 53
Heating	Capacity [Min-Rated-Max]	kW 3.5 - 13.2 - 16.5
	Total Input [Rated]	kW 3
	ACOP/COP	4.37/4.40
	Running Current [Rated]	A 13.8 - 13.2
	Sound Pressure Level	dBA 57
Max. Running Current		A 29.8
Breaker Size		A 32
Dimensions [HxWxD]		mm 1048 x 950 x 330
Weight		kg 87
Pre-Charge Refrigerant		kg 2.4
Piping	Diameter [Gas/Liquid]	mm 9.52 x 5 + 12.7 x 1 / 6.35 x 6
	Max. Length [Total-Each]	m 80 - 25
	Max. Height	m 15
Guaranteed Operating Range [Outdoor]		Cooling °C D.B. -10 ~ 46
		Heating °C W.B. -15 ~ 24



SPECIFICATIONS



INDOOR UNIT			MSZ-AP25 VGD2-A1	MSZ-AP35 VGD2-A1	MSZ-AP42 VGD2-A1	MSZ-AP50 VGD2-A1	MSZ-AP60 VGD2-A1	MSZ-AP71 VGD2-A1	MSZ-AP80 VGD2-A1
Fan Speed			Quiet-Lo-Mid-Hi-SHi-Auto						
Cooling	Airflow [min-max]	L/s	82 - 205	82 - 223	90 - 223	100 - 258	157 - 315	160 - 310	160 - 342
	Sound Pressure Level [Min-Max]	dBA	19 - 44	19 - 45	26 - 49	28 - 49	29 - 48	30 - 49	30 - 53
Heating	Airflow [min-max]	L/s	82 - 190	82 - 215	88 - 233	93 - 268	180 - 338	170 - 320	170 - 320
	Sound Pressure Level [Min-Max]	dBA	18 - 42	19 - 45	26 - 46	28 - 48	30 - 48	30 - 51	30 - 51
Dimensions	Height	mm	299	299	299	299	325	325	325
	Width	mm	798	798	798	798	1100	1100	1100
	Depth	mm	219	219	219	219	257	257	257
Weight		kg	10.5	10.5	10.5	10.5	16.0	17.0	17.0
Pipe Size [Liquid/Gas]		mm	ø6.35/ø9.52	ø6.35/ø9.52	ø6.35/ø9.52	ø6.35/ø12.70	ø6.35/ø12.70	ø6.35/ø12.70	ø6.35/ø12.70

HANDHELD CONTROLLER PAR-SL97A-E



With an easy to read display and a variety of operating modes at the touch of a button. This controller features a weekly and 24 hour timer, On/Off timer to set operating times on a daily basis. The 'i-Save' mode recalls the preset temperature.

FEATURES:

- 24 hour timer
- Mode and fan speed selection
- i-Save mode
- 3D i-See Sensor controller (PAR-SL100A-E only)

 **4.8** ★★★★★ **712+** Reviews

