


# PANASONIC SPLIT SYSTEM

## FEATURES



**With nanoE X™**  
Better air quality for home.

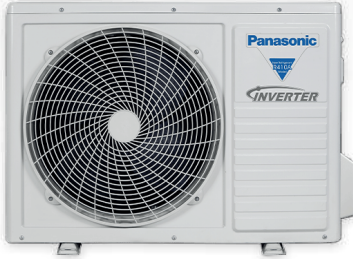

**Voice Control**  
Control your multi split air conditioner using your voice.



**Faster and Further Airflow with AEROWINGS**

AEROWINGS delivers cooling comfort across the room by concentrating cool air to deliver faster and further airflow.

5 year part and labour warranty

## SPECIFICATIONS

INDOOR UNIT MODEL WALL-MOUNTED Z SERIES WITH NANO™ X AND BUILT-IN WI-FI			CS-Z25XKRW	CS-Z35XKRW	CS-Z42XKRW	CS-Z50XKRW	CS-Z60XKRW	CS-Z71XKRW
Capacity	kW		2.5	3.5	4.2	5.0	6.0	7.1
Power Source			Single Phase 240V, 50Hz					
Sound Pressure Level (H/L/Q-Lo)	Cooling	dBA	42/27/21	46/28/21	46/33/30	46/36/30	49/38/35	51/39/36
	Heating	dBA	42/29/23	46/31/24	46/34/30	46/36/30*	50/38/35	51/39/36
Power Source Level (H/L/Q-Lo)	Cooling	dBA	58/43/37	62/44/37	62/49/46	62/52/46	65/54/51	67/55/52
	Heating	dBA	58/45/39	62/47/40	62/50/46	62/52/46*	66/54/51	67/55/52
Airflow	Cooling/Heating	L/s	188/200	193/202	193/202	208/228	328/338	352/367
Dimensions	Height	mm	290	290	290	290	295	295
	Width	mm	779	779	779	779	1040	1040
	Depth	mm	209	209	209	209	244	244
Net Weight		kg	8	8	8	8	12	13
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	mm	ø 9.52	ø 9.52	ø 9.52	ø 9.52	ø 12.70	ø 12.70

INDOOR UNIT MODEL WALL-MOUNTED RZ SERIES			CS-MRZ20WKR	CS-RZ25XKRW	CS-RZ35XKRW	CS-RZ42XKRW	CS-RZ50XKRW	CS-RZ60XKRW	CS-RZ71XKRW
Capacity	kW		2.0	2.5	3.5	4.2	5.0	6.0	7.1
Power Source			Single Phase 240V, 50Hz						
Sound Pressure Level (H/L/Q-Lo)	Cooling	dBA	42/27/24	42/27/21	46/28/21	46/33/30	46/36/30	49/38/35	51/39/36
	Heating	dBA	42/29/26	42/29/23	46/31/24	46/34/30	46/36/30*	50/38/35	51/39/36
Power Source Level (H/L/Q-Lo)	Cooling	dBA	58/43/40	58/43/37	62/44/37	62/49/46	62/52/46	65/54/51	67/55/52
	Heating	dBA	58/45/42	58/45/39	62/47/40	62/50/46	62/52/46	66/54/51	67/55/52
Airflow	Cooling/Heating	L/s	188/198	188/200	193/202	193/202	208/228	328/338	352/367
Dimensions	Height	mm	290	290	290	290	295	295	295
	Width	mm	779	779	779	779	779	1040	1040
	Depth	mm	209	209	209	209	209	244	244
Net Weight		kg	8	8	8	8	8	12	13
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	mm	ø 9.52	ø 9.52	ø 9.52	ø 9.52	ø 9.52	ø 12.70	ø 12.70



# SPECIFICATIONS

OUTDOOR UNIT MODEL			CU-5Z100VBR
Power Source			Single Phase 240V, 50Hz
Cooling Operation	Capacity [Min-Max]	kW	10.00 (2.30-11.50)
Maximum Connectable Capacity		kW	18.3
Maximum Connectable Indoors		Units	5
Electrical Data	Running Current	A	11.8
	Power Input [Min-Max]	kW	2.60 (0.43-3.59)
	AEER/EER	W/W	3.81 / 3.85
Noise (H)	Sound Pressure Level	dBA	53
	Sound Power Level	dBA	69
Heating Operation	Capacity	kW	12.00 (3.40-14.50)
Electrical Data	Running Current	A	12.1
	Power Input [Min-Max]	kW	2.76 (0.58-4.02)
	ACOP/COP	W/W	4.31 / 4.35
Noise (H)	Sound Pressure Level	dBA	56
	Sound Power Level	dBA	72
Maximum Current		A	21.3
Starting Current		A	12.5
Compressor Output		W	1700
Dimensions	Height	mm	999
	Width	mm	940
	Depth	mm	340
Net Weight		kg	81
Power Supply			Outdoor
Pipe Length Range (1 room)		m	3~25
Maximum Pipe Length (total)		m	80
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35
	Gas Side	mm	ø 9.52
Operating Range	Cooling	(°C)	-10~+46
	Heating	(°C)	-15~+24**

## WIRELESS REMOTE CONTROLLER



- LCD screen and self-diagnosis
- Daily and weekly timer
- Temperature and fan speed adjustment
- Airflow direction adjustment
- Smart control and Wi-Fi connectivity

 **4.8** ★★★★★ **712+** Reviews

