


PANASONIC MULTI SPLIT SYSTEM



FEATURES

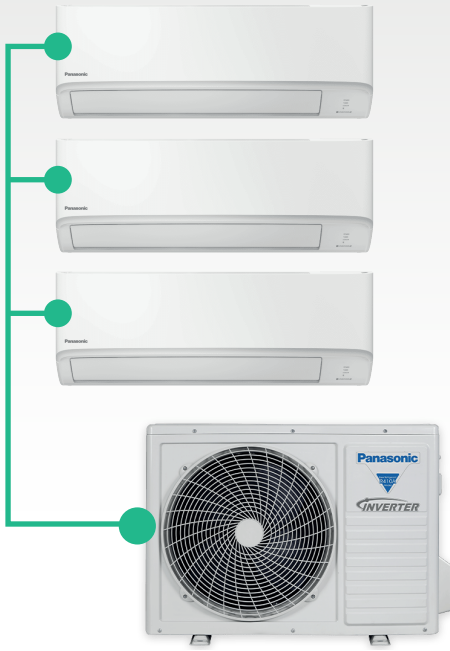

With nanoe X™
Better air quality for home.



Voice Control
Control your multi split air conditioner using your voice.



Faster and Further Airflow with AEROWINGS

AEROWINGS delivers cooling comfort across the room by concentrating cool air to deliver faster and further airflow.

5 year part and labour warranty

SPECIFICATIONS

| INDOOR UNIT MODEL WALL-MOUNTED Z SERIES WITH NANO™X AND BUILT-IN WI-FI | | | CS-Z25XKRW | CS-Z35XKRW | CS-Z42XKRW | CS-Z50XKRW | CS-Z60XKRW | CS-Z71XKRW |
|--|-----------------|-------|-------------------------|------------|------------|------------|------------|------------|
| Capacity | kW | | 2.5 | 3.5 | 4.2 | 5.0 | 6.0 | 7.1 |
| Power Source | | | Single Phase 240V, 50Hz | | | | | |
| Sound Pressure Level (H/L/Q-Lo) | Cooling | dB(A) | 42/27/21 | 46/28/21 | 46/33/30 | 46/36/30 | 49/38/35 | 51/39/36 |
| | Heating | dB(A) | 42/29/23 | 46/31/24 | 46/34/30 | 46/36/30* | 50/38/35 | 51/39/36 |
| Power Source Level (H/L/Q-Lo) | Cooling | dB(A) | 58/43/37 | 62/44/37 | 62/49/46 | 62/52/46 | 65/54/51 | 67/55/52 |
| | Heating | dB(A) | 58/45/39 | 62/47/40 | 62/50/46 | 62/52/46* | 66/54/51 | 67/55/52 |
| Airflow | Cooling/Heating | L/s | 188/200 | 193/202 | 193/202 | 208/228 | 328/338 | 352/367 |
| Dimensions | Height | mm | 290 | 290 | 290 | 290 | 295 | 295 |
| | Width | mm | 779 | 779 | 779 | 779 | 1040 | 1040 |
| | Depth | mm | 209 | 209 | 209 | 209 | 244 | 244 |
| Net Weight | | kg | 8 | 8 | 8 | 8 | 12 | 13 |
| Refrigerant Pipe Diameter | Liquid Side | mm | ø 6.35 | ø 6.35 | ø 6.35 | ø 6.35 | ø 6.35 | ø 6.35 |
| | Gas Side | mm | ø 9.52 | ø 9.52 | ø 9.52 | ø 9.52 | ø 12.70 | ø 12.70 |

| INDOOR UNIT MODEL WALL-MOUNTED RZ SERIES | | | CS-MRZ20WKR | CS-RZ25XKRW | CS-RZ35XKRW | CS-RZ42XKRW | CS-RZ50XKRW | CS-RZ60XKRW | CS-RZ71XKRW |
|---|-----------------|-------|-------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Capacity | kW | | 2.0 | 2.5 | 3.5 | 4.2 | 5.0 | 6.0 | 7.1 |
| Power Source | | | Single Phase 240V, 50Hz | | | | | | |
| Sound Pressure Level (H/L/Q-Lo) | Cooling | dB(A) | 42/27/24 | 42/27/21 | 46/28/21 | 46/33/30 | 46/36/30 | 49/38/35 | 51/39/36 |
| | Heating | dB(A) | 42/29/26 | 42/29/23 | 46/31/24 | 46/34/30 | 46/36/30* | 50/38/35 | 51/39/36 |
| Power Source Level (H/L/Q-Lo) | Cooling | dB(A) | 58/43/40 | 58/43/37 | 62/44/37 | 62/49/46 | 62/52/46 | 65/54/51 | 67/55/52 |
| | Heating | dB(A) | 58/45/42 | 58/45/39 | 62/47/40 | 62/50/46 | 62/52/46 | 66/54/51 | 67/55/52 |
| Airflow | Cooling/Heating | L/s | 188/198 | 188/200 | 193/202 | 193/202 | 208/228 | 328/338 | 352/367 |
| Dimensions | Height | mm | 290 | 290 | 290 | 290 | 295 | 295 | 295 |
| | Width | mm | 779 | 779 | 779 | 779 | 779 | 1040 | 1040 |
| | Depth | mm | 209 | 209 | 209 | 209 | 209 | 244 | 244 |
| Net Weight | | kg | 8 | 8 | 8 | 8 | 8 | 12 | 13 |
| Refrigerant Pipe Diameter | Liquid Side | mm | ø 6.35 | ø 6.35 | ø 6.35 | ø 6.35 | ø 6.35 | ø 6.35 | ø 6.35 |
| | Gas Side | mm | ø 9.52 | ø 9.52 | ø 9.52 | ø 9.52 | ø 9.52 | ø 12.70 | ø 12.70 |

GLOWER

(03) 9007 7878

www.glower.com.au



SPECIFICATIONS

| OUTDOOR UNIT MODEL | | | CU-5Z100VBR |
|------------------------------|-----------------------|-------|-------------------------|
| Power Source | | | Single Phase 240V, 50Hz |
| Cooling Operation | Capacity [Min-Max] | kW | 10.00 (2.30-11.50) |
| Maximum Connectable Capacity | | kW | 18.3 |
| Maximum Connectable Indoors | | Units | 5 |
| Electrical Data | Running Current | A | 11.8 |
| | Power Input [Min-Max] | kW | 2.60 (0.43-3.59) |
| | AEER/EER | W/W | 3.81 / 3.85 |
| Noise (H) | Sound Pressure Level | dBA | 53 |
| | Sound Power Level | dBA | 69 |
| Heating Operation | Capacity | kW | 12.00 (3.40-14.50) |
| Electrical Data | Running Current | A | 12.1 |
| | Power Input [Min-Max] | kW | 2.76 (0.58-4.02) |
| | ACOP/COP | W/W | 4.31 / 4.35 |
| Noise (H) | Sound Pressure Level | dBA | 56 |
| | Sound Power Level | dBA | 72 |
| Maximum Current | | A | 21.3 |
| Starting Current | | A | 12.5 |
| Compressor Output | | W | 1700 |
| Dimensions | Height | mm | 999 |
| | Width | mm | 940 |
| | Depth | mm | 340 |
| Net Weight | | kg | 81 |
| Power Supply | | | Outdoor |
| Pipe Length Range (1 room) | | m | 3~25 |
| Maximum Pipe Length (total) | | m | 80 |
| Refrigerant Pipe Diameter | Liquid Side | mm | ø 6.35 |
| | Gas Side | mm | ø 9.52 |
| Operating Range | Cooling | (°C) | -10~+46 |
| | Heating | (°C) | -15~+24** |

WIRELESS REMOTE CONTROLLER



- LCD screen and self-diagnosis
- Daily and weekly timer
- Temperature and fan speed adjustment
- Airflow direction adjustment
- Smart control and Wi-Fi connectivity

 **4.8** ★★★★★ **712+** Reviews

