

315L CO2 RECLAIM ENERGY SPLIT SYSTEM

FEATURES



Save up to 80% on your hot water bill



Australian made technology



7 Operational modes



Multiple timer and temperature control



FREE access to Reclaim Energy App




Real-time usage and consumption

5-year warranty

SPECIFICATIONS

MODEL	EPHE-4550P-A
Heat output at 32.6°C ambient/21.1°C cold water inlet	5.24 kW
Electric input at 32.6°C ambient / 21.1°C cold water inlet	0.87 kW
COP at 32.6°C ambient / 21.1°C cold water inlet	6.02
Power input (MAX)	2.5 kW
Current input (MAX)	11 A
Circuit breaker size	20 A
Standby power consumption	0.0019 kW
Power supply (V/Hz)	230-240V/50Hz [single phase]
Heat Pump refrigerant	CO2 [R744]
Heat pump hot water delivery temp.	63°C
Range of operating ambient temp.	-10 to 43°C
Heat pump unit weight	48 kg
Heat pump location	outdoor
Noise level	37 dB
Dimensions (H x W x D) mm	675 x 825 x 300
Rain resistance	IPX4
Water port connections (Inlet/outlet)	1/2" BSP, 12.7 mm
Built-in freeze and frost control (°C)	Variable

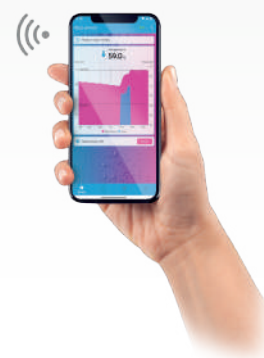

GLOWER

(03) 9007 7878

www.glower.com.au



Looking to **save money** and **boost** your home's **energy efficiency**?



Glower is an accredited provider of the VEU program, which means we not only help you choose the right system for your needs, but also handle the entire installation process, from the initial call to the final installation.

5-year warranty

315L CO2 RECLAIM ENERGY SPLIT SYSTEM



- ◆ 80% more efficient
- ◆ Back up element
- ◆ Local and reliable installers

Replace your old gas hot water system to an electric heat pump and access over \$3,000 in rebates.



GLOWER


(03) 9007 7878


www.glower.com.au

